

CORROSION PROPERTIES OF ZIRCONIUM IRRADIATED BY LOW-ENERGY HIGH-CURRENT ELECTRON BEAM*

E.A. PESTEREV, E.V. YAKOVLEV, M.S. SLOBODYAN, A.B. MARKOV, A.V. SOLOVYOV, V.I. PETROV

Tomsk Scientific Center of the Siberian Branch of the Russian Academy of Sciences, Tomsk, Russian Federation

Attractive properties, such as low neutron absorption, good corrosion resistance, and a satisfactory combination of ductility and strength, have made it possible to widely use Zr alloys in the chemical and nuclear industries [1–3]. To obtain optimal surface properties of Zr alloys, attempts were made to use various surface treatment methods, such as ion implantation [4], microarc oxidation [5], laser surface melting [6], etc.

As another method of material surface modification, low-energy high-current electron beam (LEHCEB) has attracted wide attention due to its great application potential and advantages [7]. When irradiated with LEHCEB, high energy can be released in the surface layer in a very short time and produce extremely fast heating, melting and even evaporation, then rapid cooling through the thermal conductivity of the sample. The dynamic stress fields caused by the rapid cooling process lead to intense modifications that can propagate in the material up to several tens of microns in depth. Accordingly, special modification effects can be achieved and, as a consequence, the corrosion properties of the material can be improved [8, 9].

Fig. 1, a shows the polarization curves in a 3.5% NaCl solution to compare the corrosion resistance between the original and irradiated samples. After LEHCEB irradiation, a wide area of primary passivity is visible, as well as an increase in the corrosion potential. Fig. 1, b also shows the SEM image of the Zr surface of the corrosion experiment. Pits with an interesting broken pattern appeared over the entire area of impact of the solution.

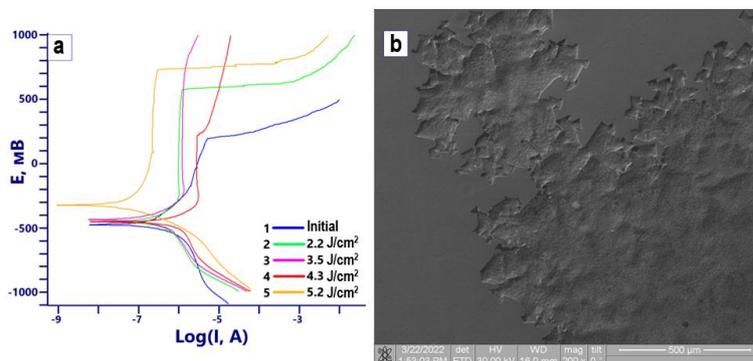


Fig. 1 – Potentiodynamic polarization curves (a) of Zr before and after irradiation with LEHCEB and SEM image (b) after the corrosion experiment.

REFERENCES

- [1] S.J. Zinkle, G.S. Was, Materials challenges in nuclear energy / Zinkle S.J., Was G.S., // *Acta Mater.* 61 (2013) 735–758.
- [2] M. Slobodyan High-energy surface processing of zirconium alloys for fuel claddings of water-cooled nuclear reactors // *Nucl. Engin. and Design.* 382 (2021) 111364
- [3] J. Yang Review on chromium coated zirconium alloy accident tolerant fuel cladding / Yang J. [et al.] // *Journal of Alloys and Compounds.* 895 (2022) 162450
- [4] D.Q. Peng Surface analysis and corrosion behavior of zirconium samples implanted with yttrium and lanthanum / Peng D.Q., Bai X.D., Chen B.S., // *Surf. Coat. Technol.* 190 (2005) 440–447.
- [5] D.L. Zhang Microarc oxidation of zircaloy-4 / Zhang D.L. [et al.] // *Rare Met. Mater. Eng.* 32 (2003) 658–661.
- [6] K.F. Amouzouvi Microstructural changes in laser hardened Zr-2.5Nb alloy / Amouzouvi K.F. [et al.] // *Scripta Metall. Mater.* 32 (1995) 289–294
- [7] D.I. Proskurovsky Pulsed electron-beam technology for surface modification of metallic materials / Proskurovsky D.I. [et al.] // *J. Vac. Sci. Technol., A* 16 (1998) 2480–2488.
- [8] S. Yang Microstructures and properties of zirconium-702 irradiated by high current pulsed electron beam / Yang S. [et al.] // *Nucl. Instrum. Meth. Phys. Res. B* 358 (2015) 151–159.
- [9] В.П. Ротштейн Поверхностная модификация титанового сплава низкоэнергетическим сильноточным электронным пучком при повышенных начальных температурах / Ротштейн В.П. [и др.] // *Физика и химия обработки материалов.* – 2006. – С. 62-

* The work was supported by the Ministry of Science and Higher Education of the Russian Federation (project № FWRP-2021-0001).