

MORPHOLOGY OF CORUNDUM MICROSPHERES PRODUCED BY THE PLASMA METHOD*

V.V. SHEKHOVTSOV, R.E. GAFAROV, N.K. SKRIPNIKOVA, A.B. ULMASOV, O.A. KUNTS

Tomsk State University of Architecture and Building, TSUAB, Tomsk, Russia

Today, the relevance of corundum microspheres is due to their high-performance characteristics (high strength, melting point, wear resistance, etc.). The combination of these characteristics increases the demand in the industrial market. Thus, the search for new technological solutions for the efficient production of corundum microspheres from natural materials is topical. The high melting point of corundum (2345 K) imposes a number of restrictions on the use of classical heating sources. The most efficient and structurally simple are direct current electric arc plasmatron, which make it possible to realize a plasma flow with an average mass temperature of ≥ 5000 K [1–4].

This paper presents the results of experimental studies of obtaining corundum microspheres based on boehmite γ -AlO(OH) in a thermal plasma medium. It is expedient to evaluate the effectiveness of plasma exposure by the spheroidization of particles and the formation of a non-porous shell [5]. On Fig. 1 shows electronic images of three types of formed shells of corundum microspheres during plasma treatment.

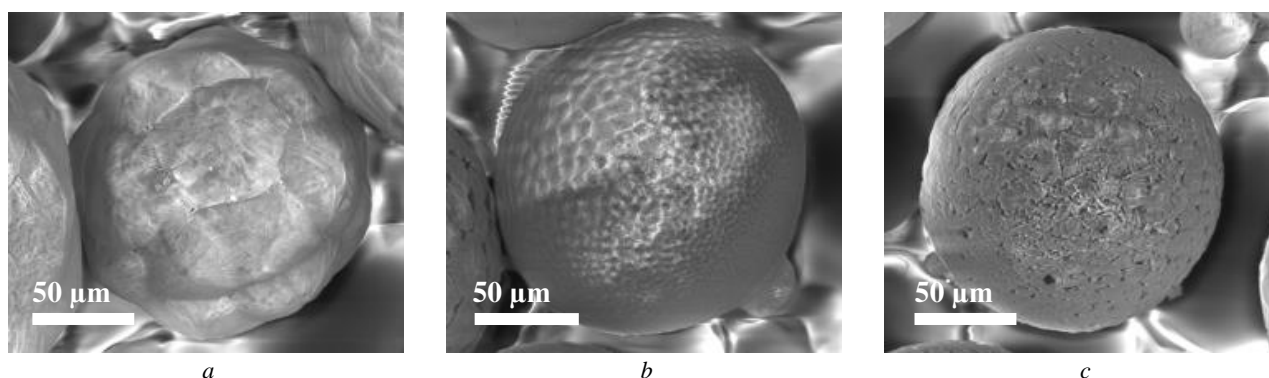


Fig.1. Surface morphology of microspheres based on boehmite.

The first type (Fig. 1, *a*) of the particle surface structure is characterized by the presence of acute-angled craters. Some craters are interconnected, the size of the craters is in the range of 2–5 μm . The second type (Fig. 1, *b*) of the surface structure includes prismatic particles fused together with rounded corners 5–10 μm in size. The third view (Fig. 1, *c*) of the particle surface is presented as separate hilly layers. The different type of surface structure of particles obtained in a plasma flow is associated with the peculiarities of the preparation of agglomerated powders based on boehmite and is difficult to control during thermal treatment. According to the results of EDX spectrometry, no change in the elemental composition depending on the morphology of the obtained microspheres was found. The obtained energy spectra indicate that the composition contains a high content of aluminum (Al) – 67.42 wt. %. The content of oxygen (O) is fixed at around 29.66 wt. %. There are traces of silicon (Si) with a concentration of 2.92 wt. %.

REFERENCES

- [1] V.A. Vlasov, V.V. Shekhovtsov, O.G. Volokitin, G.G. Volokitin, N.K. Skripnikova, A.A. Klopotov, “Physical processes of SiO_2 spherical particle formation in thermal plasma flow,” *Russian Physics Journal*, vol. 61, no. 4, pp. 708–714, 2018.
- [2] I.P. Gulyaev, O.P. Solonenko, “Simulation of the behavior of hollow ZrO_2 particles in a plasma jet, taking into account their thermal expansion,” *Thermophysics and Aeromechanics*, vol. 20, no. 6, pp. 789–802, 2013.
- [3] Y.A. Abzaev, G.G. Volokitin, N.K. Skripnikova, O.G. Volokitin, V.V. Shekhovtsov, “Investigation of the melting of quartz sand by low-temperature plasma,” *Glass and Ceramics*, vol. 72, no. 5–6, pp. 225–227, 2015.
- [4] O.G. Volokitin, V.V. Shekhovtsov, “Prospects of application of low-temperature plasma in construction and architecture,” *Glass Physics and Chemistry*, vol. 44, no. 3, pp. 251–253, 2018.
- [5] E. Pfender, Y.C. Lee, “Particle dynamics and particle heat and mass transfer in thermal plasmas. Part I. The motion of a single particle without thermal effects,” *Plasma Chemistry. Plasma Processing*, vol. 5, no. 3, pp. 211–237, 1985.

* The work was carried out with the support of the state task of the Ministry of Science and Higher Education of the Russian Federation FEMN–2020–0004 and grant President of the Russian Federation MK–66.2022.4.