

## BEHAVIOR OF PREMIXED STRETCHED FLAMES IN PLANAR CHANNEL\*

*S.N. MOKRIN<sup>1,2</sup>, V.V. GUBERNOV<sup>2</sup>, S.S. MINAEV<sup>2,3</sup>*

<sup>1</sup>*Far Eastern Federal University, Vladivostok, Russia*

<sup>2</sup>*P.N. Lebedev Physical Institute RAS, Moscow, Russia*

<sup>3</sup>*Institute of Applied Mathematics FEB RAS, Vladivostok, Russia*

Experimental studies of low stretched flames require the microgravity conditions due to the significant effect of natural convection on the flame. This restriction forces the use of expensive experimental facilities. In recent studies [1, 2], an experimental setup allowing to reduce the natural convection effect on flame was proposed and it makes possible study low stretched flames under normal gravity conditions. The counter-current flames in these papers were stabilized inside a flat microchannel. In present study, we proposed an experimental setup to study a low stretched flame stabilized near heated wall. The aim of the work was to establish the effect of a heated wall on the normal speed and flame extinction limit.

A lean ( $\phi=0.6$  and  $\phi=0.7$ ) methane-air stretched flames were investigated in experiment. The stretch rate was determined as the ratio of fresh mixture velocity at the burner outlet to the distance from the edge of the burner and heated wall. The average temperature along the heated wall was  $1000\pm 20$  K and  $1200\pm 25$  K, respectively. Location of the flame front was determined by averaging of blue signal peaks along the flame front line at a distance of  $\pm 1$  cm from the burner's symmetry axis. For each experimental point, five images were taken, the data from which were averaged and the corresponding errors were determined.

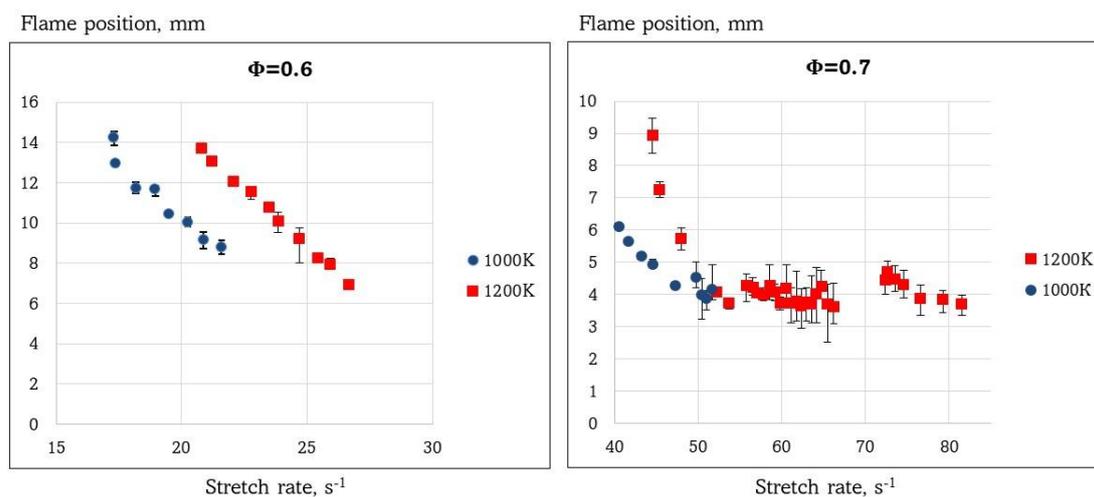


Fig.1. Dependency of flame location on stretch rate for different equivalence ratios and wall temperatures

Fig. 1 shows the dependences of flame front location on stretch rate obtained from the experiment. The experimental data clearly shows that a decreasing the wall temperature leads to a narrowing of the flame extinction limit. In addition, the experiment shows a significant difference from works [3, 4], in which the distance between the flames tended to zero and there was a critical value of stretch rate at which the flames collapsed. One of the explanations of this phenomena may be the fact that the selected wall temperatures were “relatively” low, and thus an additional heat loss from the reaction zone appeared in the system, which led to early quenching.

### REFERENCES

- [1] M.J. Lee et al, “Characteristics of opposed flow partially premixed flames in mesoscale channels at low strain rates”, Proceedings of the Combustion Institute, vol. 35 (3), pp. 3439–3446, 2015
- [2] S. Mokrin et al, “Flammability limit of moderate- and low-stretched premixed flames stabilized in planar channel”, Combustion and Flame, vol. 185, pp. 261–264, 2017.
- [3] K. Maruta et al, “Experimental study on methane-air premixed flame extinction at small stretch rates in microgravity”, Symposium (International) on Combustion, vol. 26, pp. 1283–1289, 1996.
- [4] H. Guo et al, “Radiation Extinction Limit of Counterflow Premixed Lean Methane-Air Flames”, Combustion and Flame, vol. 109, pp. 639–646, 1997.

\* The work was supported by the Russian Science Foundation (project #21-13-00434)